

TOUGH AND DEPENDABLE

Mahindra IMPLEMENTS



MOWING & GRASS MAINTENANCE EQUIPMENT



Mahindra

TOUGH AND DEPENDABLE

Mahindra IMPLEMENTS



DON'T SETTLE FOR AVERAGE

Mahindra's implement product range is based on a long history of pairing the right implement with the right tractor. In this way the implement is performance-matched to the appropriate tractor to provide superior results and many years of reliable service. Mahindra farm implements are designed to work for you day in and day out. From tillers to pallet forks, rotary cutters to bale spears, these implements will help you get your work done and move on to the next task.

OUR SERVICE TO YOU THE CUSTOMER

Mahindra Agriculture of North America thanks you for your interest in our wide range of agricultural equipment. Your selection of tools is just as important as the selection of your tractor – a 1 hour job shouldn't take all weekend - and at Mahindra, we have a simple approach to selecting attachments and implements for your tractor to help you GET YOUR WORK DONE. Your Mahindra dealer is ready to help you choose the best implement package for your needs – whether it's digging trenches, moving rocks, dirt or materials, Mahindra helps you transform the land you own into the land you love. Maximize your versatility and work smarter, not harder with the perfect complement to the World's #1 Selling Farm Tractors* .

*2018 data including all Mahindra group brand sales.

OUR HISTORY

Humble beginnings are the seeds for bigger things to come Mahindra Agriculture of North America started with one man, one trailer, and the will to Rise anchored by strong roots in the town of Tomball, TX in 1994. This is the "Mahindra Way" of doing business, called Rise. Accepting no limits, alternative thinking and driving positive change fuels our determination to succeed. We engaged our customers one-by-one so people could experience the Mahindra difference our commitment to deliver the toughest tractors and utility vehicles on earth. Today, we are not only the fastest growing tractor brand in North America, we are the World's #1 Selling Farm Tractor. We owe it to our customers and dealers who share our values and principles of working hard, delivering on promises and going above and beyond.

PRODUCTS

3-Point Rotary Cutters.....	4
F-Series Flex Wings.....	6
mShred Shredders.....	9
3-Point Hitch Finish Mowers.....	10
Fertilizer/Spreaders.....	11
Grass Collectors.....	12
Notes.....	13
Compatibility Chart.....	14



**ONLY SETTLE FOR THE BEST FOR
YOUR OPERATION.**

3-Point Rotary Cutters

ROTARY CUTTER

FEATURE AND BENEFITS

3-PT STANDARD DUTY

- 40 HP gear box with 5-year warranty
- Your choice of shear bolt or slip clutch PTO
- Front and Rear chain guard optional
- 1.5" cutting capacity
- Fully welded rotary cutter top not skip welded
- Replaceable skid shoes

3-PT MEDIUM DUTY

- 90 HP gear box with 5-year warranty
- Slip clutch PTO
- Front and Rear chain guard optional
- 2" cutting capacity
- 7" Side bands
- Replaceable skid shoes

Seeking a solution for tall grass, heavy brush and dense vegetation around your house or small farm? Mahindra 3-point standard-duty and medium-duty rotary cutters are ready for the job. With sizes and setups to match your brush mowing needs and up to 2 inches of cutting capacity, these machines are simple to use, dependable and help you get your work done faster. Replaceable skid shoes and a fully welded deck provide longer life for years of operation, and a 5-year gear box warranty comes standard on all models.



SPECIFICATIONS

	STANDARD DUTY			MEDIUM DUTY	
DESCRIPTION (Size)	48"	60"	72"	60"	72"
Overall Height	36"	36"	36"	36"	36"
Overall Width	52"	65"	77"	65"	77"
Overall Length with Tailwheel	84"	96"	108"	96"	108"
Cutting Width	46"	59"	71"	59"	71"
Weight (lbs)	436	510	645	615	755
Cutting Height (3" Offset Blades)	2.50"- 8"				
Cutting Capacity (Max. Cutting Diameter)	1.5"			2"	
Deck Thickness	11 GA Steel				
Hitch Type	CAT I				
Gearbox	40 HP (5-year warranty)			90 HP (5-year warranty)	
Slip Clutch	Optional				
Stump Jumper	Pan Stump Jumper			75"	
Solid Wheel Type	4x8 Laminated				

HD Rotary Cutters

ROTARY CUTTER

FEATURE AND BENEFITS

HEAVY DUTY CUTTERS - 3-PT

- Slip Clutch PTO
- 90 HP Gearbox
- Fully welded deck
- Replaceable skid shoes
- Optional rear & front chain guards
- CAT II quick hitch compatible
- 5', 6', 7', 8' & 10' width's



HEAVY DUTY CUTTERS - PULL TYPE

- Slip Clutch PTO
- 90 HP Gearbox
- Fully welded deck
- Cuts 3" diameter material at ground level
- Replaceable skid shoes
- Optional rear & front chain guards
- 7', 8' & 10' width's



Mahindra heavy-duty rotary cutters are ready to take a beating and keep on going. These units are designed for tractors with 35-90 PTO horsepower and offer a deck made of 7-gauge steel that's fully welded. Replaceable skid shoes and a solid stump jumper ensure that the terrain is no match for these heavy-duty machines, and a slip clutch comes standard for more assurance of years of operation backed by a 5-year gear box warranty.

HEAVY DUTY						
SPECIFICATIONS	DESCRIPTION (Size)	60"	72"	84"	96'	120'
	Overall Height	37"				
	Overall Width	65"	77"	92"	102"	125"
	Overall Length	62"	74"	85"	55"	61"
	Overall Length with Tailwheels	96"	108"	116"	88"	94"
	Cutting Width	57.50"	67.50"	81.50"	93.5"	114.5"
	Weight (lbs)	875	1205	1375	1125	1407
	Cutting Height (3" Offset Blade)	2.50" - 8"				
	Cutting Capacity (Max. Cutting Diameter)	3.00"				
	Deck Thickness	7 GA Steel				
Hitch Type	CAT II					
Gearbox	90 HP					
Slip Clutch	Standard					
Stump Jumper (5' & 6' Cutters)	.62" - Solid Round					
Solid Round Stump Jumper				.75" Solid - Oblong		
Wheel Type	4x8 Laminated					

F-Series Flex Wings

ROTARY CUTTER

MOW LIKE A PRO

The Mahindra F-Series flex wing rotary cutters provide multiple mowing sizes and configurations to suit your mowing needs. Available in 4 different models, from the 10' F-10, 12' F-12, or 15' F-15 available as either a Farmer or Pro version; These cutters offer serious cutting capacity that is perfectly matched with today's increasing application requirements. Filled with renowned Lucas Oil as standard, and boasting 5-year gearbox warranties, you can rest assured that your investment in a quality rotary cutter will pay off.

The F-10 is designed for and compatible with a wide variety of compact utility and small utility tractors. With a cutting capacity of 2" you can power thru thicker grasses and brush to clean up property in no time. With standard laminate tires, replaceable skid shoes, and chain guards all around; these cutters offer a safe and long lasting alternative to non-folding cutters with the added benefit of being able to fit thru an 8' gate during transport.

The F-12 gives you more with industry leading compactness for easy turning in small and tight fields. The 4 laminate tires are tucked close to the main frame, and when coupled with the equal angle pivoting hitch, this means ultimate peace of mind when dealing with irregular field shapes and mowing around trees. Large center skid shoes and tapered wing shoes provide excellent anti-scalping protection to leave field clean yet undamaged.

The F-15 comes capable of catering to 2 different application types. The Farmer version with large laminate tires is great for a ranch or farm that needs big productivity when cutting pastures and sizing crop residue after harvest. The Pro version differs in that deck rings come standard to protect the deck against blade contact in harsh environments like roadside mowing and the difficult conditions government or commercial operators put cutters in. Additionally these models come with extra large foam filled tires that allow the machines to go long distances on-road. When coupled with the 2 1/2" cutting capacity and thick 10-gauge double deck thickness, F-15 rotary cutters offer fast and productive cutting. Additionally, all F-15 cutters come with coil spring suspension to reduce the shock an operator feels to improve overall comfort and reduce fatigue.




F-Series Flex Wings

ROTARY CUTTER

FEATURE AND BENEFITS

F-10

- 93" Transport Width
- Easy Lift Composite Hood
- EZ Lock Coller
- Replaceable Skid Shoes
- Factory Filled with Lucas Oil

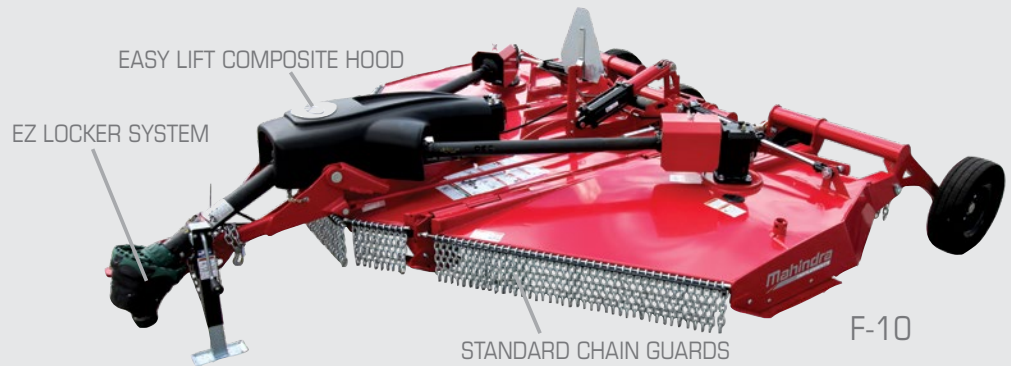

F-12

- Large Center Skid Shoes and Tapered Wing Shoes
- Smooth Deck
- Compact Design
- Equal Angle Pivoting Hitch
- Factory Filled with Lucas Oil



F-15

- Easy Lift Composite Hood
- Smooth Top and Bottom Deck
- Heavy Duty Blade Carrier
- CAT 5 CV Main Gearbox
- Coil Spring Suspension



F-Series Flex Wings

ROTARY CUTTER

SPECIFICATIONS


	F-10	F-12	F-15 FARMER	F-15 PRO
Min/Max PTO (HP)	25 - 60	35 - 60	50 - 130	
Cutting Width (ft)	10	12	15	
Hook Up	Pull Type - Clevis	Pull Type - Swivel	Pull Type -Clevis	
Tongue Weight (lbs.)	720	748	1430	
Safety Tow Chain	Standard			
Parking Stand	Standard			
PTO Speed (RPM)	540			
Driveline Protection	Slip Clutch			
Remote Valve Required	1		2	
Deck Thickness (Gauge)	12	10 Bottom / 12 Top	Double 10	
Wing Flex	90 Degrees Up, 22 Degrees Down	88 Degrees Up, 25 Degrees Down	87 Degrees Up, 25 Degrees Down	
Equipped with Deck Rings	No			Yes
Blades	1/2" X 3"		1/2" X 4" Parallel Lift	
Blade Overlap (in.)	6			
Blade Tip Speed Center (FPM)	13,028	14,504	14,861	
Blade Tip Speed Wings (FPM)	13,680	13,925	14,861	
Blade Carrier	Infinity-Steel	Wing Bar	Infinity-Steel	
Maximum Cutting Capacity (in.)	2	1 1/2	2 1/2	
Min/Max Cut Height (in.)	1-15	2-12	2-14	
Height Adjustment	3 1/2" X 8" Hyd Cylinder			
Side Skirt Thickness	1/4" x 10"	1/4" x 11 1/2"	1/4" x 12 3/8"	
Skid Shoes	Standard			
Stump Jumper	Standard			
Front and Rear Guard Type	Single Chain			
Type of Tires and Wheels	Laminate			Foam Filled
# of Tires and Wheels	4		6	
Size of Wheels	6" x 9" x 20.75"		6.5" x 14" x 25.5"	25.5" x 7" x 14"
Overall Height Transport (in.)	68	65	75	
Overall Length (in.)	162	148	172	
Overall Width in Working Position (in.)	126	155	187	
Transport Width (in.)	93	97	116	
Basic Warranty	1 Year Full		1 Year Full	
Gearbox Warranty	5-year Limited		5-year Limited/2 Year Seals	
Intended for Commercial or Government Use	No			Yes
Weight (lbs.)	2,190	2,750	4,290	

mShred Shredders

SHREDDER

FEATURE AND BENEFITS

- Weight Where It Counts
- Tried and True Cutting Blades
- Multiple Roter Speeds
- Standard Chain Guards
- Standard Rear Roller

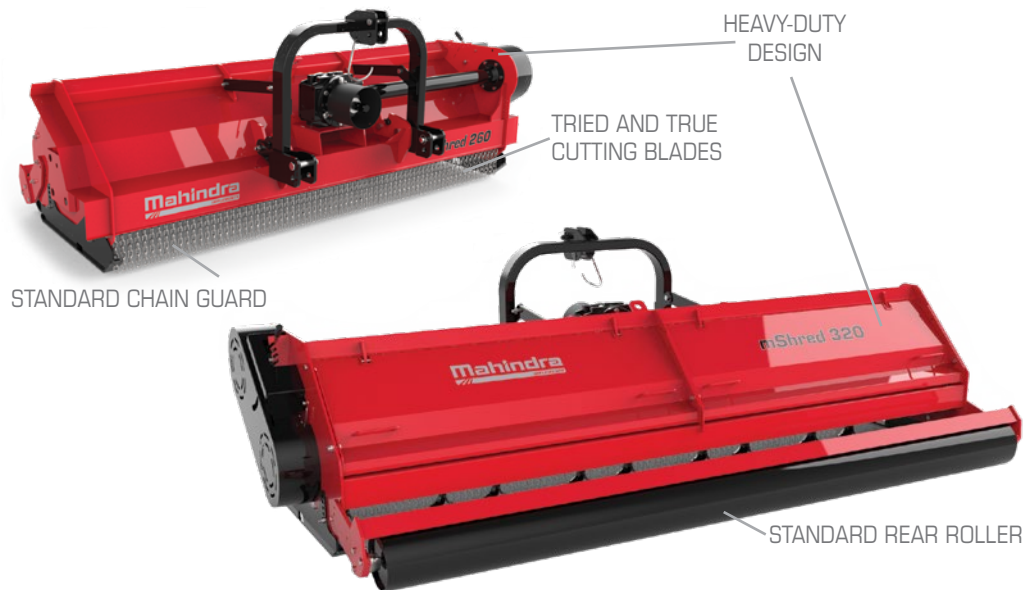

SERIOUS SHREDDING POWER FOR MULTIPLE CUSTOMER TYPES

The Mahindra mShred series of rotary shredders are built for those who are looking for high capacity shredding of pastures, field crops and green spaces. These machines are built stout with a heavy-duty frame, proven gearbox, thick 4-gauge shredding hoods and heavy Y Type blades for years of high performance. These machines have over a decade worth of experience in tough environments around the world and can thoroughly mow anything from light grasses to heavy field crops, like BT corn and cotton.

SPECIFICATIONS

	MSHRED 260	MSHRED 320
Min/Max PTO (HP)	50 - 80	55 - 80
Cutting Width (ft)	8' 6"	10' 6"
Hook Up Type	3-Point Mounted	
Hitch Category	2	
PTO Speed	540	
PTO Category	T7	
Remote Valve Required	No	
Hood Thickness (Gauge)	4	
Rotor Size (in.)	23.75	
Standard Rotor Speed	422	
Type of Blades	Y Type	
# of Blades	56	72
Blade Length (in.)	7.9	
Min/Max Cut Height (in.)	1 - 4.75	
Overall Height (ft)	3' 6"	
Overall Length (ft)	4.5	
Overall Width in Working Position (ft)	9	11
Basic Warranty	2 Years Full	
Weight (lbs.)	2500	2800



3-Point Hitch Finish Mowers

FINISH MOWER

FEATURE AND BENEFITS

- Quick hitch compatible
- Numerous adjustable parts to accomplish a wide variety of mowing needs
- Low maintenance machine and the little maintenance required is easily accessible



Designed for more refined cutting than a rotary cutter, Mahindra finish mowers come ready to tackle that overgrown landscaping and leave behind a smooth and well-groomed high-quality look. These units come standard with a floating hitch to hug the contours of your ground, anti-scalp oversized wheels and other features to keep your landscaping at its best. They're also easily adjustable and low maintenance machines.

SPECIFICATIONS

	4'	5'	6'	7'
Tractor HP Requirement	14 - 40 HP	23 - 40 HP	32 - 40 HP	35 - 50 HP
Weight (Approx.)	400 lbs	509 lbs	549 lbs	803 lbs
Hitch	Category 1, with clevis pins for fast hook up			
Floating hitch	Adjustable front & rear to hug uneven terrain			
Gear box	Heavy duty with a 5yr limited warranty			
Wheel adjustment	To adjust cutting height. Large pivoting wheels for better flotation.			
Discharge	Rear discharge			
Anti-scalp	Anti-scalp wheels to avoid damaging lawns			
Spindles	Greaseable with check valves			
Protection	Shear bolt protection system			
Height adjustment	Yes			
Offset	Horizontal offset adjustable			
Blades	3 high quality 21" blades mounted on spindles			
Belt	Self adjusting belt tensioner			
Warranty	Residential, semi-commercial, regular commercial use: 1 year			

Fertilizer/Spreaders

FERTILIZER/SPREADER

FEATURE AND BENEFITS

- Polyurethane hopper and heavy-duty gearbox for lasting durability
- Category I
- PTO drive line
- Rugged tube steel frame
- Quick reference spreading chart
- Capacities
 - » 1020 lbs. - 3-Point
 - » 480 lbs. - 3-Point
 - » 480 lbs. - Pull Type



Perfect for grass seed, fertilizer and small grains, Mahindra spreaders come ready with a anti-rust polyurethane hopper, tube steel main frame and plenty of slinging power. An easily visible spreading chart is handy for quick reference for putting down just the right amount of product.

SPECIFICATIONS

	1020 3-POINT	480 3-POINT	480 PULL TYPE
Hopper Design		Cone Shaped	
Hopper Material		Polyurethane	
Hitch Type		Category I	
Gearbox		Heavy-Duty	
Drive type		PTO drive line	
Frame Type		Tube steel	
Side Panel		Height 14"	

Grass Collectors

GRASS COLLECTOR

FEATURE AND BENEFITS

- 12 bushel capacity
- Easy hook up
- Quick hitch compatible
- Deflector assures all 3 bags are filled evenly
- Bags are made of light weight durable material
- 60" deck for:
 - » eMax L
 - » Max 25XL
 - » Max 26XLT



Leave the dirty work to the Mahindra 12-bushel grass collector. This collector is designed to leave your property looking its best and make work easy by removing those unwanted grass clippings, leaves and other small debris normally left behind by mowing. Easy hook up and quick hitch compatible, this collector utilizes a handy deflector that ensures all three bags are evenly filled and is made of a light weight material which makes for easy handling and dumping.

SPECIFICATIONS

	60" DECK
Installation	Easy hook-up to 3-Point Hitch and compatible with quick hitch.
Container Dimensions	56"x 24"x 6"
Weight	350 lbs approx.
Bag Catcher	11.75 bu. capacity in three bag catchers
Spring	2 gas springs to help open the lid.
Hood	Steel hopper hood.
Deflector	Deflector makes sure all three bags are filled evenly
Belt Guard	Protective guard
Blower	Belt drive fan for easy setup
Chute	Connecting tube from blower to bag catcher
Bags	3 separate bags for easy handling and dumping
Warranty	Residential, light commercial or utility use: 2 yrs

*Not Compatible with eMax20s**

Compatibility Chart

SERIES	SUB COMPACT		COMPACT		1600 Series			26
	eMax S	eMax L	MAX XL	Max XLT	1626	1635	1640	2638 / 2645
48" (4') STANDARD DUTY CUTTER	X	X	X	X				
60" (5') STANDARD DUTY CUTTER		X		X	X	X	X	X
72" (6') STANDARD DUTY CUTTER								X
60" (5') MEDIUM DUTY CUTTER W/SLIP CLUTCH					X	X	X	X
72" (6') MEDIUM DUTY W/SLIP CLUTCH 2 TAIL WHEELS								
84" (7') HEAVY DUTY 2 TW 90 HP GEAR BOX								
96" (8') HEAVY DUTY LIFT CUTTER								
48" (4') FINISH MOWER	X	X	X					
60" (5') FINISH MOWER	X	X	X	X	X	X	X	X
72" (6') FINISH MOWER					X	X	X	X
84" (7') FINISH MOWER								
FERTILIZER SPREADER LIFT TYPE 1020 lbs					X	X	X	X
FERTILIZER SPREADER LIFT TYPE 480 lbs	X	X	X	X	X	X	X	X
FERTILIZER SPREADER PULL TYPE 480 lbs	X	X	X	X	X	X	X	X
MSHRED 260 (8'6" SHREDDER)								
MSHRED 320 (10'6" SHREDDER)								
F-10 ROTARY CUTTER (10' FLEX WING)							X	X
F-12 ROTARY CUTTER (12' FLEX WING)								
F-15 FARMER ROTARY CUTTER (15' FLEX WING)								
F-15 PRO ROTARY CUTTER (COMMERCIAL 15' FLEX WING)								
GRASS COLLECTOR FOR 60" MOWER DECK		X	X	X				

COMPACT UTILITY								UTILITY									
2000 Series		3600 Series		4500 Series				5500 Series		6000 Series		7000 Series		8000 Series		9000 Series	
2660	2670	3640	3650	4540 2WD	4540 4WD	4550 2WD	4550 4WD	5545	5555	6065	6075	7085	7095	8090	8100	9110	9125
X	X	X	X	X	X	X	X	X									
X	X	X	X	X	X	X	X	X	X								
			X	X	X	X	X	X	X	X	X						
			X	X	X	X	X	X	X	X	X	X					
X	X	X	X	X	X	X	X										
X	X	X	X	X	X	X	X										
X	X	X	X	X		X							X		X	X	X
X	X	X	X	X		X	X		X	X	X						
X	X	X	X	X		X	X		X	X	X						
	X									X	X	X	X	X	X		
											X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X	X	X	X						
X	X		X			X	X		X	X	X						
										X	X	X	X	X	X	X	X
										X	X	X	X	X	X	X	X



Mahindra USA, Inc., Reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were made to verify the information contained in it. Some items shown may be optional and some machinery shown may not be available at all dealers. Mahindra disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety, and product information, consult your local Mahindra dealer and the product operation manual. Engine power (HP/KW) and other specifications are based on various standards and best practices. This brochure is intended for the United States and its territories only. For more information visit www.Mahindrausa.com.

FOR MORE INFORMATION GO TO:

MahindraUSA.com | MahindraCanada.com
9020 Jackrabbit Road, Suite 600 | Houston, Texas 77095 | 877-449-7771
© 2019 MahindraUSA | MAH-0819 / MAH 2019IMP